

CHATEAU SERIES DV GAS FIREPLACES

THIS INFORMATION IS FOR REFERENCE ONLY.

SPECIFICATIONS

Chateau 42 DV Gas Fireplace


HEATING CAPACITY	up to 2,250 sq. ft.*	
FIREPLACE WEIGHT	250 lbs.	
BTU INPUT	Natural Gas LP Gas (Propane)	high 42,000 high 37,000 low 29,500 low 25,000
STEADY STATE EFFICIENCY**	83% – 86%	
BLOWER	200 CFM variable speed blower (standard)	
HORIZONTAL D.V. PIPE	5" X 8" Simpson Dura-Vent	
VERTICAL D.V. PIPE	4" X 6-5/8" Simpson Dura-Vent	

Chateau 30 DV Gas Fireplace

HEATING CAPACITY	up to 1,400 sq. ft.*	
FIREPLACE WEIGHT	200 lbs.	
BTU INPUT	Natural Gas LP Gas (Propane)	high 30,000 high 28,500 low 20,000 low 20,000
STEADY STATE EFFICIENCY**	82% – 86%	
BLOWER	200 CFM variable speed blower (standard)	
D.V. PIPE DIAMETER	4" X 6-5/8" Simpson Dura-Vent/Security SecureVent	

* Heating capacity varies due to home insulation, floor plan and climate.
** Efficiency varies slightly with various pipe configurations.

UNIT DIMENSIONS

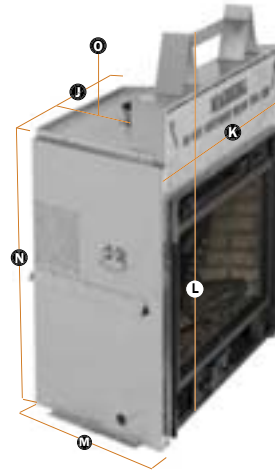


Refer to manual for multiple horizontal and vertical vent pipe configuration approvals.

	42	30
J REAR WIDTH**	29-3/4"	24-1/2"
K FRONT WIDTH	43"	41"
L OVERALL UNIT HEIGHT TO TOP OF HEADER STAND-OFF	47-3/4"	40-3/4"
M UNIT DEPTH**	20-3/4"	21"
N REAR HEIGHT	35-1/2"	27-1/8"
O BACK OF FIREPLACE TO CENTERLINE OF FLUE STARTER COLLAR	10-3/4"	8-1/2"

**These dimensions include the 3/4" stand-offs.

CHATEAU 42/30 INSTALLATIONS

Country's Chateau Series Fireplaces can be installed in residential living rooms, bedrooms, bathrooms, kitchens or mobile homes in these various configurations.




CLEARANCES

Minimum Clearance to Combustibles

	42	30
A FACE TO MANTEL	16"	13"
B FACE TO TOP FACING	10"	8-1/2"
C FACE TO SIDE FACING OR SIDE WALL	3-1/2"	3-3/4"
D SIDE FACING OR SIDE WALL TO OUTSIDE EDGE OF GLASS DOOR FRAME	7-1/2"	6-1/4"
E NON-COMBUSTIBLE CONCRETE BOARD (TOP)	10"	10"
F NON-COMBUSTIBLE CONCRETE BOARD (SIDE)	3"	5"
G HEARTH EXTENSION (ALWAYS RECOMMENDED - REQUIRED IN SOME CASES. SEE MANUAL FOR DETAILS.)	N/A	N/A
H MINIMUM COMBUSTIBLE MANTEL HEIGHT FROM BASE OF FIREPLACE	47-5/8" (7-1/2" OVERHANG)	38-1/2" (8" OVERHANG)

These minimum clearances are for reference only and should not be used for final installation.

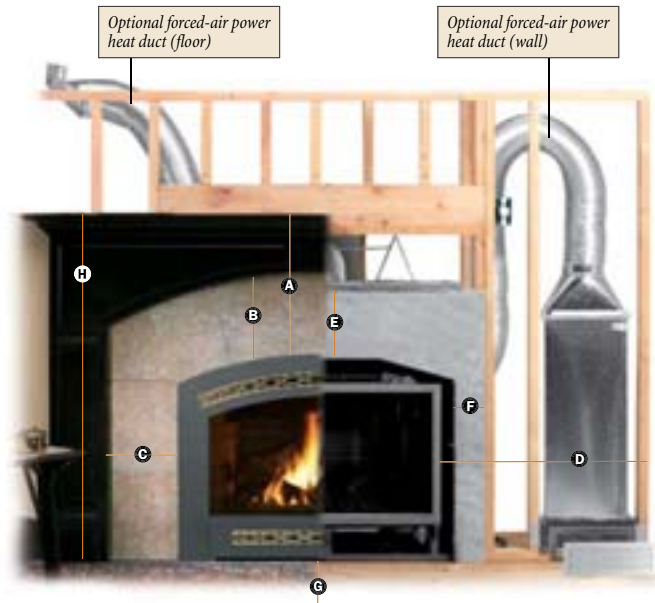


Shown with conceptual illustration of optional forced-air power heat ducting (Chateau 42 only). Refer to manual for details.

FRAMING DIMENSIONS

Minimum framing distances necessary to maintain safe clearances to combustible materials.

Note: The fireplace may be placed directly on wood or non-combustible floor, but not on vinyl floor covering or carpet.

	42	30
P (WIDTH)	44-1/2"	41-1/2"
Q (HEIGHT)	48"	41"
R (DEPTH)	21"	21"

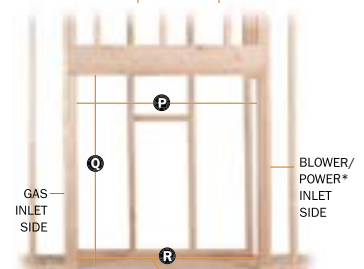

*Fireplace is not dependent on fan or outside electrical supply to operate.

COUNTRY'S STOVES
A LIFETIME OF WARMTH

www.countrystoves.com

Country Stoves, Inc., P.O. Box 959, Auburn, WA 98071-0959



© 2005 Country Stoves, Inc. Printed in the U.S.A.
Specific prices subject to change without notice. S/W Design #106242 6/2005 30M