

# WOOD FIREPLACE Insert SPECIFICATIONS



**C160  
STRIKER**



**C210  
PERFORMER**



**C260  
LEGACY**



**E260  
ELITE**



**C310  
CANYON**

**NOTICE: Specifications are for reference only and shall not be used for actual installation. Use installation manual for actual specifications.**

## SPECIFICATIONS

	C160	C210	C260	E260	C310
FRONT WIDTH	23 1/8"	25"	28"	48"	28"
REAR WIDTH (REAR TAPER WIDTH)	23 1/2" {21 1/2"}*	25 1/2" {23"}*	28 1/2"*	28 1/2"*	28 1/2"*
FRONT HEIGHT	18 1/2"	18"	20 1/2"	21 5/8"	20 1/2"
REAR HEIGHT (H)	19 1/4"	19"	22 1/2"	22 1/2"	22 1/2"
DEPTH INTO FIREPLACE (G)	12 1/2"	12 1/4"	14 1/2"	14 1/2"	14 1/2"
FLUE DIAMETER (NOTE 1)	6"	6"	6" or 8"	6" or 8"	6" or 8"
DEPTH ONTO HEARTH (F)	4 1/2"	9"	6 1/2"	6 1/2"	9"
APPROXIMATE WEIGHT	320 lbs.	400 lbs.	493 lbs.	560 lbs.	547 lbs.

**NOTE 1: Consult your Dealer or professional installer for recommended chimney sizes for your application. C260, E260 and C310 require 6" reducer for use with 6" Chimney. \*Leveling nuts extend outside this dimension.**

## CLEARANCES Any reduction of listed clearances must be done as per NFPA211 and local building official.

<b>A</b> = Insert Top to Combustible Mantel **	24"	24"	30"	23"	30"
<b>B</b> = Insert Top to Top Facing **	15"	18"	20"	17"	20"
<b>C</b> = Insert Side to Side Facing **	12"	15"	15"	4"	15"
<b>D</b> = Insert Side to Side Wall **	20"	18"	20"	9"	20"
<b>E</b> = Hearth in front of Insert (NOTE 2)	18"	18"	16"	22"	24"
<b>M</b> = Minimum Mantel Height From Bottom of Insert	42 1/2"	42"	50 1/2"	45"	50 1/2"

## FIREPLACE SIZING

Minimum Depth	12 3/4"	12 1/2"	14 3/4"	14 3/4"	14 3/4"
Minimum Height {ZC=Zero Clearance}	19 1/2" {21"ZC}	19 1/4" {21"ZC}	22 3/4"	22 3/4"	22 3/4"
Minimum Width {ZC=Zero Clearance}	25 1/2" {36"ZC}	26" {36"ZC}	30 1/2"	30 1/2"	30 1/2"
<b>J</b> = Maximum Mantel Depth (w/out use of adjustable offset box)	4 3/4"	4 1/2"	5 1/4"	5 3/4"	5 1/4"

## SURROUND FLANGE SIZING

Standard Size	26 1/2"H x 40"W	26 1/2"H x 40"W	29"H x 40"W	29"H x 48"W	29"H x 40"W
	26 1/2"H x 48"W	26 1/2"H x 48"W	29"H x 48"W	N/A	29"H x 48"W
Oversized	30 1/2"H x 40"W	30 1/2"H x 40"W	33"H x 40"W	32"H x 48"W	33"H x 40"W
	30 1/2"H x 48"W	30 1/2"H x 48"W	33"H x 48"W	N/A	33"H x 48"W

**NOTE 2: For each 2" the hearth is raised above flooring, hearth requirement may be reduced by 2". 16" minimum in all installations. E + F = Total hearth extension required from opening of fireplace.**

## ZERO CLEARANCE FACTORY-BUILT

### FIREPLACE APPROVAL



**C160 and C210:** Approved for installation into the following factory built wood burning fireplaces – Heatilator, Majestic, Superior, Martin, Preway, Marco, Temco and FMI with a minimum of 36-inches in width at cavity opening and 21-inches of height. Refer to owners manuals for more details.

### CHIMNEY REQUIREMENTS

**C160 and C210:** Installation in a zero clearance factory-built wood burning fireplace requires a stainless extension from the flue outlet fully into the chimney of the fireplace. A full length liner is recommended for optimum performance and safety.

All Inserts: Approved with or without positive flue connection in masonry fireplaces. For maximum safety and performance we recommend full length stainless steel chimney liners, especially in factory-built fireplaces. Ask your dealer or professional installer for the recommended chimney size to use for your application.

Country Stoves reserves the right to alter or improve its products without notice. Inserts are tested to U.L. 1482.

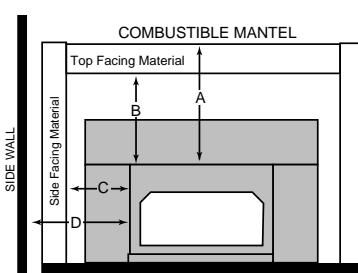

\*\*Reductions may be available for A, B, C, & D dimensions. See owners manual or ask your dealer. Shielding must be used. NOTE: Combustible material projecting more than 3/4" from wall above or beside the insert shall be considered mantel or sidewall.

**COUNTRY STOVES**  
A LIFETIME OF WARMTH

www.countrystoves.com

Country Stoves, Inc., P.O. Box 959, Auburn, WA 98071-0959

